


Animoko Motion Control Rig Technical Specifications

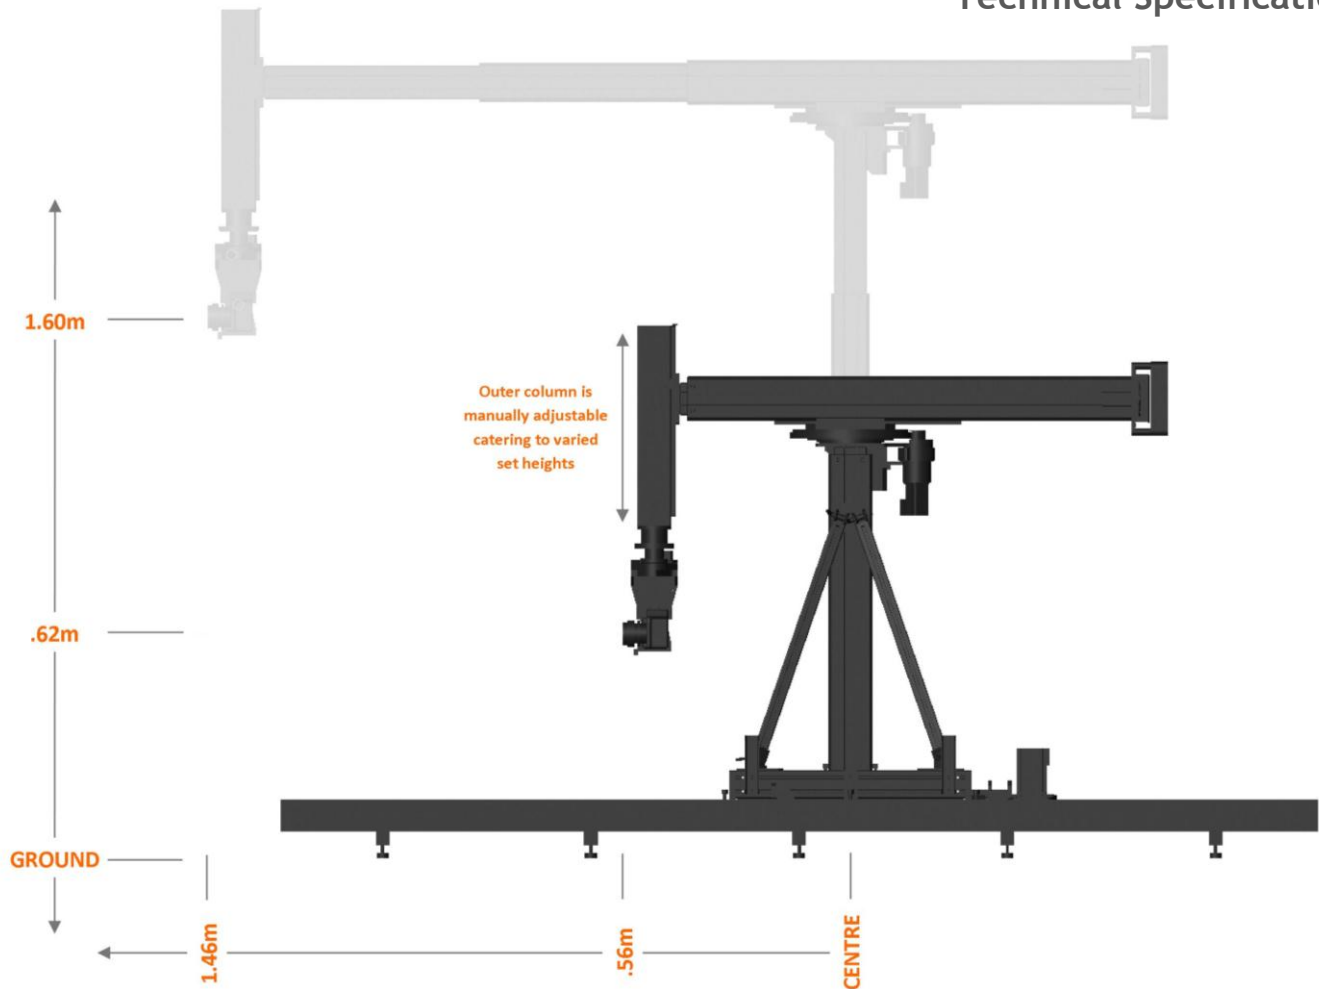

Operating Envelope

Height	Shown above at 1.60m (column can be manually adjusted for additional height as needed)
Lowest position	.62m
Maximum travel	.98m
Maximum reach (from rotate centre)	1.46m
Maximum reach (from turret)	.90m

Rig Dimensions (for clearances)

Animoko Minimum Height (off track)	1.35m
Animoko Minimum Height (on track)	1.50m
Animoko base width	.75m
Animoko base length (with track motor)	1.05m

Rig Performance

Axis	Range of Travel	Maximum Speeds
Track	As required in 3m lengths	.50m per second
Rotate	360 degrees	3 degrees per second
Lift	.98m	2cm per second
Arm Extend	.90m	2cm per second
Pan	360 degrees	100 degrees per second
Tilt	360 degrees	100 degrees per second

Rig Weights

	Kg	Lbs
Animoko	130	286
Total weight of Animoko	130	286
Each 3m track	55	121
Flair Operator Console	32	70

Power Connection

Power requirements: 110-240 Volts, Frequency 50-60 Hz

Generator: 6.5 KVA

Please note: Mr Moco Rentals reserves the right to change these specifications without notice.
Spec dimensions dependent on type and size of camera used on the rig.